




# HP Everyday Adhesive Matte Polypropylene, 3-in Core



## The HP large format printing system—the complete solution

HP Designjet, HP Latex, and HP Scitex Printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

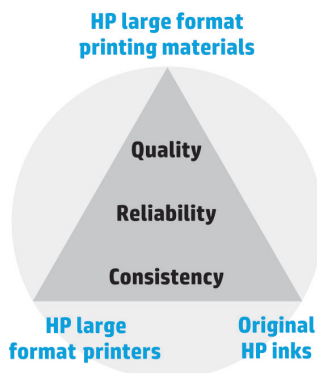

## High-quality prints for your day-to-day production

### Produce eye-catching displays

See outstanding image quality. Work with the wide color gamut and smooth transitions delivered by this matte polypropylene material and produce quality prints from line drawings to photo-quality POP displays.

### Gain efficiency

Help keep your production process moving smoothly. This easy-to-use film features a permanent self adhesive for secure, reliable mounting.

### Make the versatility of this material work for you

ICC profiles help you get the right color, right away. Take advantage of compatibility with Original HP Latex, dye, and pigmented inks on this versatile, easy-to-use printing material.

| Target customers                         | Applications                  | Benefits  |
|--|-------------------------------|---|
| Print service providers                  | POP and retail displays       | Outstanding image quality for day-to-day production     |
| Retail store in-house printing           | Trade show and event displays | A permanent self-adhesive for secure, reliable mounting |
| Event designers                          | Temporary exhibitions         |   |
| Advertising agencies                     | Architecture competitions     |   |
| Geographic Information Systems (GIS)     |                               |   |
| Government (printing self-adhesive maps) |                               |   |

## Technical specifications



### HP Everyday Adhesive Matte Polypropylene, 3-in Core

For the latest ICC profiles/paper presets, please visit [HPLFMedia.com/hp/paperpresets](https://HPLFMedia.com/hp/paperpresets).

|                                  |   |                                   |                  |                             |
|----------------------------------|---|-----------------------------------|------------------|-----------------------------|
| <b>Weight (base film)</b>        | 95 g/m² per ISO 536 Test Method   |                                   |                  |                             |
| <b>Weight (with liner)</b>       | 168 g/m² per ISO 536 Test Method  |                                   |                  |                             |
| <b>Thickness (base film)</b>     | 160 microns/7.1 mil per ISO 534 Test Method   |                                   |                  |                             |
| <b>Thickness (with liner)</b>    | 215 microns/8.5 mil per ISO 534 Test Method   |                                   |                  |                             |
| <b>Opacity (with liner)</b>      | Greater than 96% per TAPPI T-425 and ISO 2471 Test Methods  |                                   |                  |                             |
| <b>Brightness (with liner)</b>   | 101% per ISO 2470 Test Method   |                                   |                  |                             |
| <b>Whiteness (without liner)</b> | Greater than 120 per ISO 11476 Test Method  |                                   |                  |                             |
| <b>Whiteness (with liner)</b>    | 150 per ISO 11475 Test Method   |                                   |                  |                             |
| <b>Finish</b>                    | Matte   |                                   |                  |                             |
| <b>Operating temperature</b>     | 15 to 35° C / 59 to 95° F   |                                   |                  |                             |
| <b>Operating humidity</b>        | 20 to 80% RH  |                                   |                  |                             |
| <b>Dry time</b>                  | Less than 2 minutes (at 23° C, 50% RH)  |                                   |                  |                             |
| <b>Lamination</b>                | Yes   |                                   |                  |                             |
| <b>Shelf life</b>                | 2 years, unopened in original packaging   |                                   |                  |                             |
| <b>Storage temperature</b>       | 15 to 35° C / 59 to 95° F   |                                   |                  |                             |
| <b>Storage humidity</b>          | 15 to 30% RH  |                                   |                  |                             |
| <b>Country of origin</b>         | Product of China  |                                   |                  |                             |
| <b>Ordering information</b>      | <b>Product numbers</b>  | <b>Roll sizes</b>                 | <b>UPC codes</b> | <b>Region</b>               |
|                                  | D9R24A  | 914 mm x 30,5 m (36 in x 100 ft)  | 848412009798     | North America, Europe, Asia |
|                                  | D9R25A  | 1067 mm x 30,5 m (42 in x 100 ft) | 848412009804     | North America, Europe, Asia |
|                                  | D9R26A  | 1270 mm x 30,5 m (50 in x 100 ft) | 848412009811     | North America, Europe, Asia |
|                                  | D9R27A  | 1524 mm x 30,5 m (60 in x 100 ft) | 848412009828     | North America, Europe, Asia |
| <b>Warranty</b>                  | HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see <a href="https://HPLFMedia.com/hp/MediaWarranties">HPLFMedia.com/hp/MediaWarranties</a> . To obtain warranty service, please contact Brand Management Group customer support at <a href="https://HPLFMedia.com/hp/en/contactus">HPLFMedia.com/hp/en/contactus</a> . |                                   |                  |                             |

For detailed information on the HP large format printing materials portfolio and to order, visit [HPLFMedia.com](https://HPLFMedia.com)

© 2020 HP Development Company, L.P. © 2020 Brand Management Group. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.

HP is a registered trademark of HP Development Company, L.P. and is used by Brand Management Group on license from HP Development Company, L.P.

