
HP Premium Matte Photo Paper





The HP large format printing system—the complete solution

HP DesignJet, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

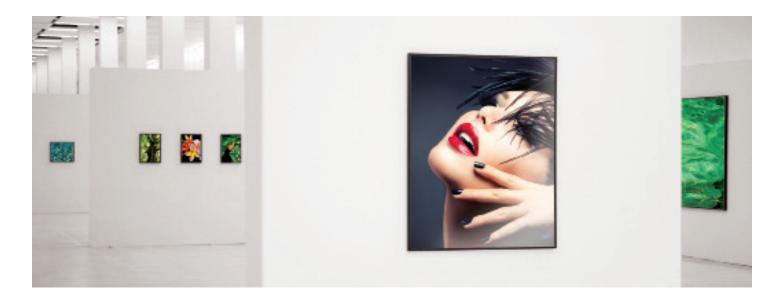

- With Original HP 91 or HP 70 Photo Inks. Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see HPLFMedia.com/printpermanence.
- With Original HP 91 or HP 70 Photo Inks or Original HP 83 UV inks. Water resistance testing by HP Image Permanence Lab on a range of HP media and follows ISO 18935 method. For more information, see HPLFMedia.com/printpermanence.
- With Original HP 771 Vivid Photo Inks, Original HP 91 Photo Inks, Original HP 70 Photo Inks, or HP 83 UV inks. Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12 hr day. For more information, see HPLFMedia.com/ printpermanence.

See rich, lustrous photo-realistic image quality

Achieve vibrant color with an elegant finish

When the design requires a premium touch to capture the best of digital fine art, look to this heavy, matte-finish photo paper with an elegant, smooth finish. From full-color graphics to photo-realistic images, see lustrous highlights, rich details.

Enable worry-free handling

Move quickly and smoothly through post-print processing. Instant-dry prints—even with high ink densities—enable immediate handling and lamination. Excellent film laminate compatibility gives you options.

Create a wide range of durable photo applications

Produce a wide array of graphics-display applications and print with both Original HP dye- and pigment-based inks. Deliver prints with over 200 years indoor display permanence. Offer unlaminated, water-resistant prints.

Target customers	Applications	Benefits	
Print service providers	Photo enlargements	Highly-saturated, photo-realistic images	
Creative professionals	Posters and presentations	Vibrant color on an elegant, smooth finish	
Retail stores	Trade show and event displays	Flat, smooth prints even under high ink densities	
Advertising agencies	POP and retail displays	Excellent film laminate compatibility	
Graphic designers		Instant-dry prints with unlaminated water resistance ²	
		Up to 3 years laminated, 1+ years unlaminated in-window display permanence ³	
		200+ years indoor display permanence ¹	
		Compatible with both Original HP dye- and pigment-based inks	

Technical specifications



HP Premium Matte Photo Paper

For the latest ICC profiles/paper presets and a variety of resources to help you get the most out of your printer and HP large format materials, please visit **HPLFMedia.com/paperpresets**.

Warranty	HP large format printing materials are free from defects in materials and workmanship. For warranty statement please see HPLFMedia.com/hp/MediaWarranties .					
	CG460B	914 mm x 30,5 m (36 in x 100 ft)	848412013399	Worldwide		
-	CG459B	610 mm x 30,5 m (24 in x 100 ft)	848412013382	Worldwide		
Ordering information	Product num	bers Rollsizes	UPC codes	Region		
Country of origin	Product of Germany					
Storage humidity	5 to 95% RH					
Storage temperature	0 to 40° C / 32 to 104° F					
Shelf life	1 year, unopened in original packaging					
Lamination	Yes, with thermal, heat assist, and pressure-sensitive film laminates					
Dry time	Instant dry (at 23° C, 50% RH)					
Display permanence (Indoor home or office)	200+ years away from direct sun with Original HP 91 or HP 70 Photo Inks; 100+ years with Original HP 83 UV inks ⁵					
Display permanence (Commercial in-window)	3+ years laminated, 1+ years unlaminated with Original HP 91 Photo Inks; 1+ years unlaminated, 2+ years laminated with Original HP 771 Vivid Photo Inks; 1+ years unlaminated, 1+ years laminated with Original HP 70 Photo Inks or HP 83 UV inks ⁴					
Operating humidity	20 to 80% RH					
Operating temperature	15 to 35° C / 59 to 95° F					
Finish	Matte					
Whiteness	130 per CIE Ganz 82 Test Method					
Brightness	91% per TAPPI T-452 Test Method					
Opacity	98% per TAPPI T-425 Test Method					
Thickness	227 microns /10.9 mil per ISO 534 Test Method					
Weight	272 g/m² per ISO 536 Test Method, (60 lbs)					



- ⁴ Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12 hr day. For more information, see **HPLFMedia.com/hp/t/printpermanence**.
- ⁵ Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see HPLFMedia.com/hp/t/printpermanence.
- Water resistance testing by HP Image Permanence Lab on a range of HP media and follows ISO 18935 method. For more information, see HPLFMedia.com/hp/t/ printpermanence.

For detailed information on the HP large format print media portfolio and to order, visit HPLFMedia.com

© 2022Hewlett-Packard Development Company. © 2022 Brand Management Group. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.

HP is a registered trademark of Hewlett-Packard Company and is used by Brand Management Group on license from Hewlett-Packard Company.

